


SLIDING BAR LIGHT BRACKET

Fully adjustable sliding bracket system offers greater versatility and flexibility for mounting our bar lights



INCLUDES SEALED DEUTSCH CONNECTOR



40-200 WATT / UP TO 26,000 LUMEN


LED 'XTREME' XR10 LIGHT BAR

OVERVIEW

The Xtreme XR10 watt bar light series is a high output LED with specifically designed circuitry to service under high temperatures making these lights ideal for heavy industry applications such as mining and remote farming in the outback of our country.

Supplied with multiple mounting options, the standard end brackets and adjustable sliding brackets. Making mounting these bar lights extremely easy. Additionally the stainless steel mounting bolts also allow for use in marine applications.

DIMENSIONS

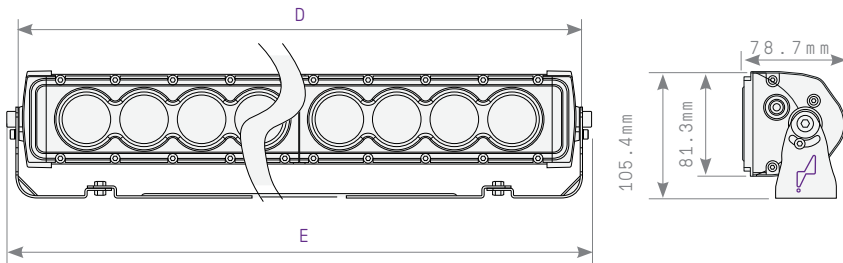

S-SPOT, F-FLOOD, C-COMBO

WATTS	D (mm)	E (mm)	LEDS	LUMENS	PRODUCT CODE
40W	254	274	4	5,200	EVBX 40WF
80W	458	478	8	10,400	EVBX 80WC
120W	660	680	12	15,600	EVBX 120WC
160W	890	910	16	20,800	EVBX 160WC
200W	1092	1112	20	26,000	EVBX 200WC

DETAILS

- 50,000 Hours Lifespan
- Cree 10W High-Powered LED Chips
- Abrasion Resistant, virtually unbreakable optically clear polycarbonate lens
- 94% efficient for more light with less power and longer life
- Sealed Deutsch Connector with 450mm Cable Length
- Runs on 9 - 36 V DC
- IP68 Certified
- 30° Spot & 65° Flood Optic
- Durable Anodised Coating
- Wiring Operating Temp: -60° C to 130° C
- Operating Temp: -40° C to 125° C
- Over/under voltage protection
- Electrically protected against RFI/EMC interference
- CE & RoHS Compliant
- 6063 Aluminium Extrusion
- Vibration certified